



PRODUCT SHEET EKL 823

Proofer
8 trays/grids (435x345 mm)

EKA IS PROOFERS



Sturdy and compact, this appliance is a trusted ally for pastry chefs or bakers wanting to drastically reduce proving times compared to traditional processes, but without compromising the quality of the results. It features a modular design so that it goes with the electric convection ovens from the 4-pan snack series.



Tecnoeka srl
via Marco Polo, 11
35010 Borgoricco - Padova - Italy
tel +39.049.5791479
tel. +39.049.9300344
fax +39.049.5794387





email
info@tecnoeka.com
tecnoekasrl@pec.com

web sites
tecnoeka.com
tecnoeka.ru



PRODUCT SHEET

EKL 823

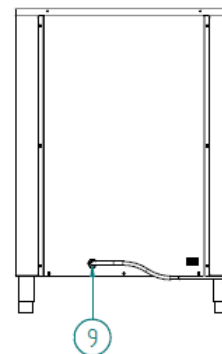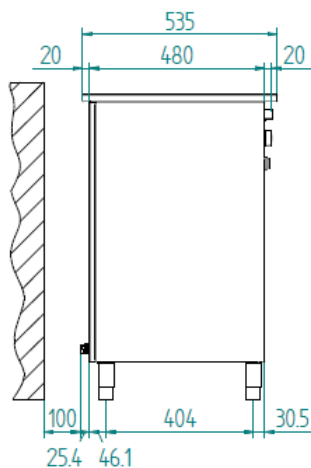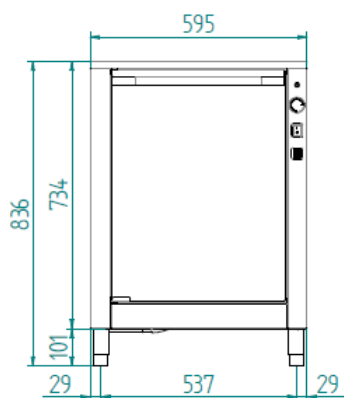


LEGEND

1	USB PORT	11	DON'T CLOG UP VENTILATION OPENINGS
2	SERIAL PORT	12	WATER INLET MAX. 200 kPa
3	PLUG FOR CORE PROBE	13	SOFTENED WATER INLET MAX 200 kPa
4	WATER OUTLET TUBE	14	BOILER CLEANING INLET
5	WASHING WATER INLET	15	DON'T OPEN CAP WHILE WORKING
6	SOFTENED WATER INLET	16	GAS INLET THREADED JOINT 3/4"
7	WATER INLET	17	POWER SUPPLY TO TOP OVEN
8	STEAM OUTLET	18	PRE-CARVED HOLE FOR BOTTOM OVEN POWER SUPPLY
9	ELECTRIC CABLE FIXER	19	STEAM SUCTION PIPE
10	CAUTION! HOT SURFACE		

PRODUCT SHEET

EKL 823



DIMENSIONAL FEATURES				TECHNICAL AND FUNCTIONAL FEATURES	
DIMENSIONS	W	D	H	POWER	ELECTRICITY
PROOFER DIMENSIONS (mm)	595	545	840	CAPACITY	N° 8 TRAYS/GRIDS (429X345 mm)
CARDBOARD BOX DIMENSIONS WITH PALLET (mm)	630	564	828*	PROOFING CHAMBER	AISI 304 STAINLESS STEEL
PROOFER DIMENSIONS (inches)	23,42	21,45	33,07	TEMPERATURE	30 ÷ 60°C
CARDBOARD BOX DIMENSIONS WITH PALLET (inch)	24,80	22,24	32,59	TEMPERATURE CONTROL	THERMOSTAT
PROOFER WEIGHT (kg)		25,8		CONTROL PANEL	ELECTROMECHANICAL – RIGHT SIDE
PACKED PROOFER WEIGHT (kg)		28,6		DOOR	LEFT SIDE HINGED DOOR
PROOFER WEIGHT (lbs)		56,87		EQUIPMENT	
PACKED PROOFER WEIGHT (lbs)		63,05		LATERAL SUPPORTS	1 RIGHT + 1 LEFT
DISTANCE BETWEEN RACK RAILS (mm)		74		CABLE	SIGLE-PHASE [3G 1,5] L=1450 mm
MODULARITY				PLUS	
OVENS	EKF 463 SERIES			NEW DOOR	